



Nouvag offers a wide range of Cannulas for most applications of liposuction. Our philosophy to provide all the necessary instruments and equipment for a specific medical field help our worldwide customers to focus on their operational tasks.

Instruments for Infiltration

Cannulas for Infiltration

Ø Cannula	Length	Ref.
3.0 mm	250 mm	4350



Needle for Infiltration

Ø Needle	Length	Ref.
0.9 mm	70 mm	4561
1.0 mm	120 mm	4562



Packing unit with 100 sterile pieces.

Ref. 4398

Luer Lock Adapter for the connection of Infiltration Cannulas and Tube sets with Luer Lock attachment.



+



Tube set with Luer Lock attachment

Infiltration needle



+



+



Tube set with Luer Lock attachment

Luer Lock adapter

Infiltration Cannula




Ref. 4390



Ref. 4391



Cannulas are attached to the handle connector without air vent, 4390, or 4391 with air vent.

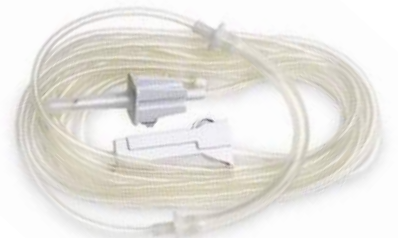

Ref. 6022

Sterile tube set for infiltration with a length of 4 meters.



Ref. 6026

Sterile suction tube with a length of 4 meters.

Liposuction Cannulas



Straight Cannulas for Abdominal Surgery



Ø Cannula	Length	Holes	Ø of Holes	Ref.
1.5 mm	150 mm	1	oval	4361
2.0 mm	150 mm	1	oval	4364
2.0 mm	150 mm	18	1.0 mm	4373
3.0 mm	150 mm	18	1.5 mm	4374
3.0 mm	200 mm	22	1.5 mm	4378
3.0 mm	300 mm	30	1.5 mm	4387
4.0 mm	200 mm	22	2.0 mm	4379
4.0 mm	300 mm	30	1.5 mm	4388

Angled Cannulas for Thigh Liposuction



Ø Cannula	Length	Holes	Ø of Holes	Ref.
3.0 mm	200 mm	22	1.5 mm	4381

Bowed Cannulas for Thigh Liposuction

Ø Cannula	Length	Holes	Ø of Holes	Ref.
3.0 mm	200 mm	22	1.5 mm	4362
3.0 mm	300 mm	30	1.5 mm	4365
4.0 mm	200 mm	22	1.5 mm	4368
4.0 mm	300 mm	30	1.5 mm	4372



Ø Cannula	Length	Ref.
3.0 mm	200 mm	4480
3.0 mm	300 mm	4481
4.0 mm	300 mm	4482
5.0 mm	300 mm	4483
6.0 mm	300 mm	4484



Ø Cannula	Length	Ref.
2.0 mm	150 mm	4364
3.0 mm	200 mm	4485
3.0 mm	300 mm	4486



Mercedes

Ø Cannula	Length	Ref.
3.0 mm	150 mm	4487
3.0 mm	250 mm	4488
4.0 mm	150 mm	4489
4.0 mm	250 mm	4490



Toledo

Ø Cannula	Length	Ref.
2.0 mm	50 mm	4595
3.0 mm	150 mm	4596
4.0 mm	250 mm	4597
5.0 mm	300 mm	4598

